

Xtrafors Prime AC Servomotors



Features

- Compact size
- High torque
- High speed
- No cogging
- Modular construction

Power

- Stall torque 0.25 to 75 Nm
- Size 34 to 192 mm

Executions

- Wide range of standard models
- Customized versions
- CE certified, UL listed

北京润诚时代科技有限公司

自动化事业部

地址：北京市朝阳区汤立路218号C 座968室

邮编：100012

电话：010-84450370

传真：010-84450371

网址：www.runcheng.net

邮箱：.runcheng_emd@sina.com

XtraforsPrime, AC Servomotors


The modular construction concept is the basis for the wide range of standard models. The slotless stator design results in outstanding technical properties such as high speed, high torque, zero cogging, minimal torque ripple, high efficiency and high rigidity. Thus, these motors are perfectly suited for various demanding servo applications.

Technical data

Type	Stall values		Nominal values		Peak values			Brake	Length
	Torque	Current	Torque	Speed	Torque	Current	Speed*	Torque	L
	M_0	i_0	M_{nom}	n_{nom}	M_{max}	i_{max}	n_{max}	M_{nom}	without brake
	[Nm]	[Arms]	[Nm]	[rpm]	[Nm]	[Arms]	[rpm]	[Nm]	[mm]
FP-0023	0.24	1.40	0.23	3000	1.44	8.40	36 000	0.4	145.0
FP-0034	0.44	2.03	0.40	3000	2.64	12.2	30 000	0.4	140.5
FP-0055	0.54	2.15	0.46	3000	3.24	12.9	22 000	1.0	90.00
FP-0105	1.00	2.51	0.90	3000	6.00	15.0	15 000	1.0	110.0
FP-0207	2.00	3.04	1.85	3000	12.0	18.2	9 500	2.0	116.5
FP-0307	2.70	3.63	2.54	3000	16.2	21.8	8 500	4.5	137.5
FP-0409	4.20	3.57	4.15	3000	25.2	21.4	5 300	4.5	147.5
FP-0609	5.60	4.97	5.12	3000	33.6	29.8	5 500	9.0	165.5
FP-0711	6.50	6.70	6.10	3000	39.0	40.2	6 300	9.0	149.0
FP-0911	9.00	7.22	8.20	3000	54.0	43.3	5 000	9.0	173.0
FP-1111	11.0	8.14	9.10	3000	66.0	48.9	4 600	18	197.0
FP-1311	13.2	9.77	10.8	3000	79.2	58.6	4 600	18	221.0
FP-1714	18.3	10.7	15.5	1500	110	64.0	3 500	18	215.0
FP-3314	31.5	12.8	27.5	1500	189	76.8	2 500	36	317.0
FP-5019	54.5	19.1	46.0	1500	327	114	2 000	72	307.0
FP-8019	75.0	22.8	59.0	1500	450	137	2 000	72	362.0

*Valid for operation with servo drive using 400VAC supply

Torque curves

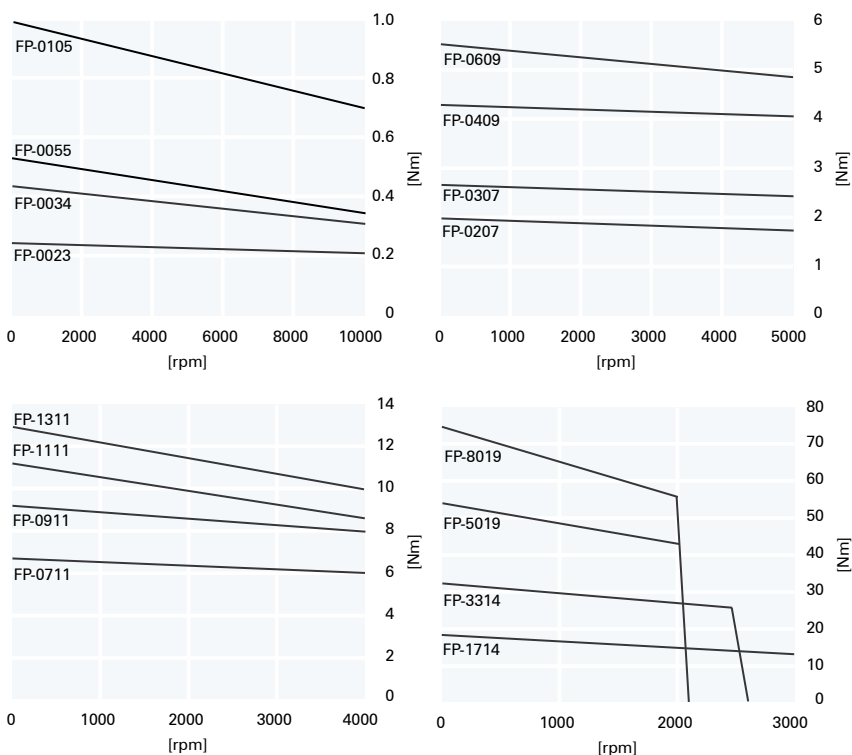

Standard version

- Resolver feedback
- Shaft with keyway
- Protection IP-65
- Rotatable angled connectors
- PTC thermal sensor
- RoHS conform
- UL conform (UL-listed pending)


Options

- Various types of incremental encoders, SinCos encoders, Hiperface, EnDat
- Shaft without keyway
- Protection IP-67
- Shaft seal
- Straight connectors
- Direct cable output
- NTC thermal sensor

Customized versions

- Shafts (i.e. hollow shafts)
- Flanges, housings
- Windings
- Connections
- Executions according to customer's specification

Mechanical dimensions

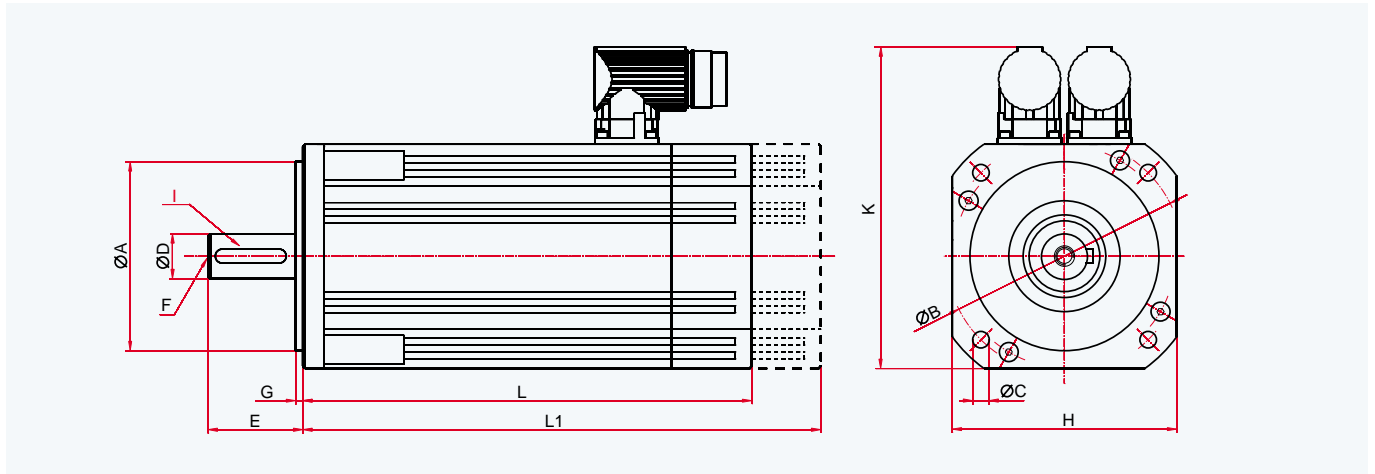

Dimensions for motor with resolver feedback

Dimensions [mm]	ØA j6	ØB	ØC	ØD k6	E	G	H	I	F	K	L	without brake	with brake
FP-0023	25	36	3.4	6 h5	20	2.5	34	-	-	62	145.0	176.0	
FP-0034	32	45	4.5	8 j5	25	2.5	42	-	-	70	140.5	171.5	
FP-0055	40	65	5.5	9	20	2.5	57	A3x3x12	M3x9	107	90.0	129.0	
FP-0105	40	65	5.5	9	20	2.5	57	A3x3x12	M3x9	107	110.0	149.0	
FP-0207	60	75	5.5	11	23	2.5	70	A4x4x14	M4x10	112	116.5	142.0	
FP-0307	60	75	5.5	11	23	2.5	70	A4x4x14	M4x10	112	137.5	165.5	
FP-0409	80	100	6.6	19	40	3	90	A6x6x30	M6x16	132	147.5	177.0	
FP-0609	80	100	6.6	19	40	3	90	A6x6x30	M6x16	132	165.5	207.0	
FP-0711	95	115	9	19	40	3	110	A6x6x30	M6x16	152	149.0	189.0	
FP-0911	95	115	9	19	40	3	110	A6x6x30	M6x16	152	173.0	213.0	
FP-1111	95	115	9	19	40	3	110	A6x6x30	M6x16	152	197.0	242.0	
FP-1311	95	115	9	19	40	3	110	A6x6x30	M6x16	152	221.0	266.0	
FP-1714	130	165	11	24	50	3.5	140	A8x7x32	M8x19	182	215.0	258.0	
FP-3314	130	165	11	24	50	3.5	140	A8x7x32	M8x19	182	317.0	370.0	
FP-5019	180	215	16	32	58	4	192	A10x8x50	M12x28	234	307.0	365.0	
FP-8019	180	215	16	32	58	4	192	A10x8x50	M12x28	234	362.0	420.0	

Lengths of executions with different encoder models

Type FP	0023	0034	0055	0105	0207	0307	0409	0609	0711	0911	1111	1311	1714	3314	5019	8019
L (without brake)																
Incremental	137.0	132.5	106.5	126.5	126.0	147.0	147.5	165.5	162.0	187.0	210.0	234.0	215.0	317.0	320.0	375.0
Endat 2.1	-	-	123.0	143.0	159.0	180.0	177.0	195.0	189.0	213.0	237.0	261.0	260.0	365.0	327.0	382.0
Hiperface	-	-	123.0	143.0	142.0	163.0	165.0	180.5	162.0	186.0	210.0	234.0	235.0	340.0	327.0	382.0
SinCos	-	-	137.0	157.0	159.0	180.0	177.0	195.0	189.0	213.0	237.0	261.0	250.0	355.0	332.0	387.0
L1 (with brake)																
Incremental	176.0	171.5	145.0	165.0	157.0	184.0	192.0	215.0	195.0	219.0	252.0	276.0	260.0	410.0	375.0	430.0
Endat 2.1	-	-	167.0	187.0	190.0	217.0	209.5	232.5	208.0	232.0	265.0	289.0	300.0	430.0	382.0	435.0
Hiperface	-	-	156.0	176.0	173.0	200.0	209.5	232.5	208.0	232.0	265.0	289.0	300.0	430.0	382.0	435.0
SinCos	-	-	172.0	192.0	190.0	217.0	214.0	244.5	217.0	241.0	283.0	307.0	310.0	440.0	385.0	440.0



The Infranor Group

Infranor creates added value for its customers by providing tailor-made motion solutions.

Based on strong working relationships, Infranor offers extensive market know-how, comprehensive engineering skills and a wide range of high-quality products leading to productivity gains and therefore to comparative advantages for its customers in their respective markets.

北京润诚时代科技有限公司

自动化事业部

地址：北京市朝阳区汤立路218号C 座968室

邮编：100012

电话：010-84450370

传真：010-84450371

网址：www.runcheng.net

邮箱：.runcheng_emd@sina.com